



The member of China
association of the
national shipbuilding Industry



MID:CT187

WWW.PACIFICOCEANPUMP.COM

船用泵选用手册

Marine pump selection manual

张家港市太平洋泵业制造有限公司

Zhangjiagang Pacific Pump Manufacturing Co., Ltd.

<http://www.pacificoceanpump.com>

V11.0

目 录

1、 DL 系列船用立式多级离心泵	
DL series Marine vertical multistage centrifugal pumps	
.....	02
2、 DL-CM 系列磁力联轴器多级船用离心泵	
DL-CM Series magnetic couplings multistage marine centrifugal pump	
.....	13
3、 G25-125 系列船用立式多级离心泵	
G25-125 series marine vertical centrifugal pump	
.....	22
4、 CISG 系列船用立式单级管道离心泵	
CISG series marine vertical single stage pipeline centrifugal pump	
.....	23
5、 1WTD2.4-10.5 系列船用立式旋涡泵	
1WTD2.4-10.5 series marine horizontal vortex(regenerative) pump	
.....	45
6、 DL-G 高压泵系列	
DL-G High pressure pump series	
.....	46

1、DL 系列船用立式多级离心泵

DL series Marine vertical multistage centrifugal pumps



SINCE 2010

The member of China
association of the
national shipbuilding ldustry



MID:CT187

WWW.PACIFICOCEANPUMP.COM

洁冠[®]

JIEGUAN[®]

“DL series
middle pressure
marine vertical
multistage
centrifugal
PUMP”

Nominal diameter	25mm to 100mm
Flow rate	Up to 200m ³ /h (820 US gpm)
Pressure	Up to 27bar (391.5psi)
Temperature	Up to 120 °C (270 °F)
Pumped liquid	Fresh water sea water
Installation	Vertical
Frequency	50 to 60 Hz
Motor	Standard and EX motor
Design service life	20 years



张家港市太平洋泵业制造有限公司

ZHANGJIAGANG PACIFIC PUMP MANUFACTURING CO., LTD.

选型数据表 Selection data sheet

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL2. 4-4	2.4	6	48/67	2900/3500	0.75/0.96	2	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	2.4	7	56/78	2900/3500	0.87/1.20	2		
	2.4	8	64/89	2900/3500	1.00/1.28	2		
	2.4	9	72/100	2900/3500	1.11/1.44	2		
	2.4	10	80/112	2900/3500	1.24/1.61	2		
	2.4	11	88/123	2900/3500	1.36/1.76	2		
	2.4	12	96/134	2900/3500	1.49/1.92	2		
	2.4	13	104/145	2900/3500	1.61/2.09	2		
	2.4	14	112/156	2900/3500	1.73/2.25	2		
	2.4	15	120/168	2900/3500	1.86/2.41	2		
	2.4	16	128/179	2900/3500	1.98/2.57	2		
	2.4	17	136/190	2900/3500	2.10/2.72	2		
	2.4	18	144/200	2900/3500	2.23/2.89	2		
	2.4	19	152/212	2900/3500	2.35/3.05	2		
	2.4	20	160/224	2900/3500	2.48/3.22	2		
	2.4	21	168/235	2900/3500	2.60/3.38	2		
	2.4	22	176/246	2900/3500	2.72/3.53	2		

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL2. 4-4	3	6	51/71	2900/3500	1.04/1.33	2	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	3	7	59.5/83	2900/3500	0.89/1.15	2		
	3	8	68/95	2900/3500	1.19/1.54	2		
	3	9	76.5/107	2900/3500	1.33/1.73	2		
	3	10	85/119	2900/3500	1.48/1.93	2		
	3	11	93.5/130	2900/3500	1.63/2.11	2		
	3	12	102/142	2900/3500	1.78/2.30	2		
	3	13	110/154	2900/3500	1.93/2.50	2		
	3	14	119/166	2900/3500	2.08/2.69	2		
	3	15	127/177	2900/3500	2.23/2.89	2		
	3	16	136/190	2900/3500	2.37/3.08	2		
	3	17	144/201	2900/3500	2.52/3.27	2		
	3	18	153/214	2900/3500	2.67/3.47	2		
	3	19	161/225	2900/3500	2.82/3.65	2		
	3	20	170/238	2900/3500	2.97/3.86	2		
	3	21	178/249	2900/3500	3.12/4.04	2		
	3	22	187/261	2900/3500	3.27/4.23	2		

型号 Type	流量 Capacity (m³/h)	级数 Series	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL2. 4-4	4	6	48/67	2900/3500	1.11/1.44	2	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	4	7	56/78	2900/3500	1.29/1.67	2		
	4	8	64/89	2900/3500	1.48/1.92	2		
	4	9	72/100	2900/3500	1.67/2.15	2		
	4	10	80/112	2900/3500	1.85/2.41	2		
	4	11	88/123	2900/3500	2.04/2.64	2		
	4	12	96/134	2900/3500	2.22/2.87	2		
	4	13	104/145	2900/3500	2.41/3.13	2		
	4	14	112/156	2900/3500	2.59/3.36	2		
	4	15	120/168	2900/3500	2.78/3.62	2		
	4	16	128/179	2900/3500	2.97/3.85	2		
	4	17	136/190	2900/3500	3.15/4.08	2		
	4	18	144/201	2900/3500	3.34/4.33	2		
	4	19	152/212	2900/3500	3.52/4.57	2		
	4	20	160/224	2900/3500	3.71/4.82	2		
	4	21	168/235	2900/3500	3.89/5.05	2		
	4	22	176/246	2900/3500	4.08/5.28	2		

型号 Type	流量 Capacity (m³/h)	级数 Series	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL2. 4-4	4.8	6	45/63	2900/3500	1.34/1.73	2	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	4.8	7	52/72	2900/3500	1.56/2.00	2		
	4.8	8	60/84	2900/3500	1.78/2.31	2		
	4.8	9	67.5/94	2900/3500	2.00/2.59	2		
	4.8	10	75/105	2900/3500	2.22/2.89	2		
	4.8	11	82.5/115	2900/3500	2.45/3.17	2		
	4.8	12	90/126	2900/3500	2.67/3.45	2		
	4.8	13	97/135	2900/3500	2.89/3.76	2		
	4.8	14	105/147	2900/3500	3.11/4.03	2		
	4.8	15	112/156	2900/3500	3.34/4.34	2		
	4.8	16	120/168	2900/3500	3.56/4.62	2		
	4.8	17	127/177	2900/3500	3.78/4.90	2		
	4.8	18	135/189	2900/3500	4.01/5.20	2		
	4.8	19	142/198	2900/3500	4.23/5.48	2		
	4.8	20	150/210	2900/3500	4.45/5.79	2		
	4.8	21	157/219	2900/3500	4.67/6.07	2		
	4.8	22	165/231	2900/3500	4.90/6.35	2		

型号 Type	流量 Capacity (m³/h)	级数 Series	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL6/12	6	2	18/25.9	2830/3470	0.40/0.52	2	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	6	3	27/37.8	2830/3470	0.60/0.78	2		
	6	4	36/50.4	2840/3470	1.07/1.39	2		
	6	5	45/63	2840/3470	1.33/1.73	2		
	6	6	54/75.6	2840/3470	1.60/2.08	2		
	6	7	63/88.2	2840/3470	1.87/2.43	2		
	6	8	72/100.8	2870/3500	2.14/2.78	2		
	6	9	81/113.4	2870/3500	2.40/3.13	2		
	6	10	90/126	2890/3520	2.67/3.47	2		
	6	11	99/138.6	2890/3520	2.94/3.82	2		
	6	12	108/151.2	2890/3520	3.20/4.17	2		
	6	13	117/163.8	2900/3520	3.47/4.51	2		
	6	14	126/176.4	2900/3520	3.74/4.86	2		
	6	15	135/189	2900/3520	4.01/5.21	2		
	6	16	144/201.6	2900/3520	4.28/5.56	2		
	6	17	153/214.2	2900/3520	4.54/5.90	2		
	6	18	162/226.8	2900/3540	4.81/6.25	2		
	6	19	171/239.4	2900/3540	5.08/6.60	2		
	6	20	180/252	2900/3540	5.35/6.95	2		
	6	21	189/264.6	2900/3540	5.61/7.28	2		
	6	22	198/277.2	2900/3540	5.88/7.62	2		

型号 Type	流量 Capacity (m³/h)	级数 Series	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL 6/12	8	2	16/22.4	2830/3470	0.68/0.90	2	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	8	3	24/33.6	2830/3470	1.03/1.32	2		
	8	4	32/44.8	2840/3470	1.37/1.79	2		
	8	5	40/56	2840/3470	1.71/2.22	2		
	8	6	48/67.2	2840/3470	2.05/2.65	2		
	8	7	56/78.2	2840/3470	2.39/3.12	2		
	8	8	64/89.6	2870/3500	2.74/3.59	2		
	8	9	72/100.8	2870/3500	3.08/4.02	2		
	8	10	80/112	2890/3520	3.42/4.44	2		
	8	11	88/123.2	2890/3520	3.76/4.91	2		
	8	12	96/134.4	2890/3520	4.10/5.34	2		
	8	13	104/145.6	2900/3520	4.44/5.77	2		
	8	14	112/156.8	2900/3520	4.79/6.24	2		
	8	15	120/168	2900/3520	5.13/6.67	2		
	8	16	128/179.2	2900/3520	5.47/7.09	2		
	8	17	136/194.6	2900/3520	5.81/7.52	2		
	8	18	144/201.6	2900/3540	6.15/8.03	2		
	8	19	152/212.8	2900/3540	6.50/8.46	2		
	8	20	160/224	2900/3540	6.84/8.89	2		
	8	21	168/235.2	2900/3540	7.18/9.32	2		
	8	22	173/242.2	2900/3540	7.52/9.79	2		

型号 Type	流量 Capacity (m³/h)	级数 Series	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL6/12	9	2	32/44.8	2840/3490	0.76/1.00	2.1	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	9	3	48/67.2	2870/3500	1.14/1.48	2.1		
	9	4	64/89.6	2890/3520	1.52/2.00	2.1		
	9	5	80/112	2900/3520	1.90/2.48	2.1		
	9	6	96/134.4	2900/3540	2.29/2.95	2.1		
	9	7	112/156.8	2900/3540	2.67/3.48	2.1		
	9	8	128/179.2	2930/3540	3.05/3.95	2.1		
	9	9	144/201.6	2930/3540	3.43/4.48	2.1		
	9	10	160/224	2930/3540	3.81/4.95	2.1		
	9	11	176/246.4	2930/3540	4.19/5.48	2.1		
	9	12	192/268.8	2930/3540	4.57/5.95	2.1		
	9	13	208/291.2	2930/3550	4.95/6.43	2.1		
	9	14	224/313.6	2930/3550	5.33/6.95	2.1		

型号 Type	流量 Capacity (m³/h)	级数 Series	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL6/12	10	2	13.6/19	2830/3470	0.84/1.09	2	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	10	3	20.4/28.6	2830/3470	1.26/1.64	2		
	10	4	27.2/38	2840/3470	1.68/2.18	2		
	10	5	34/47.6	2840/3470	2.10/2.73	2		
	10	6	40.8/57	2840/3470	2.52/3.28	2		
	10	7	47.6/66.6	2840/3470	2.94/3.82	2		
	10	8	54.4/76.1	2870/3500	3.36/4.37	2		
	10	9	61.2/85.7	2870/3500	3.78/4.90	2		
	10	10	68/95.2	2890/3520	4.20/5.46	2		
	10	11	74.5/104.3	2890/3520	4.62/5.98	2		
	10	12	81.6/114.2	2890/3520	5.04/6.55	2		
	10	13	88.4/123.8	2900/3520	5.46/7.10	2		
	10	14	95.2/133.3	2900/3520	5.88/7.65	2		
	10	15	102/142.8	2900/3520	6.30/8.19	2		
	10	16	109/152.6	2900/3520	6.72/8.74	2		
	10	17	115/161	2900/3520	7.14/9.29	2		
	10	18	122/170.8	2900/3540	7.56/9.83	2		
	10	19	129/180.6	2900/3540	7.98/10.38	2		
	10	20	136/190.4	2900/3540	8.40/10.93	2		
	10	21	143/200.2	2900/3540	8.82/11.47	2		
	10	22	150/210	2900/3540	9.24/12.02	2		

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL6/12	12	2	36/50.4	2870/3500	1.85/2.41	2.3	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	12	3	54/75.6	2890/3520	2.78/3.62	2.3		
	12	4	72/100.8	2900/3540	3.71/4.82	2.3		
	12	5	90/126	2900/3520	4.64/6.03	2.3		
	12	6	108/151.2	2930/3540	5.57/7.24	2.3		
	12	7	126/176.4	2930/3540	6.49/8.41	2.3		
	12	8	144/201.6	2930/3540	7.42/9.65	2.3		
	12	9	162/226.8	2930/3540	8.35/10.86	2.3		
	12	10	180/252	2930/3550	9.28/12.06	2.3		
	12	11	198/277.2	2930/3550	10.21/13.24	2.3		
	12	12	216/302.4	2930/3550	11.13/14.48	2.3		
	12	13	234/327.6	2940/3560	12.06/15.68	2.3		
	12	14	252/352.8	2940/3560	12.99/16.89	2.3		

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL12.5/18	12.5	2	32/44.8	2840/3490	1.93/2.51	2.5	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	12.5	3	48/67.2	2870/3500	2.90/3.77	2.5		
	12.5	4	64/89.6	2890/3520	3.86/5.02	2.5		
	12.5	5	80/112	2900/3520	4.83/6.28	2.5		
	12.5	6	96/134.4	2900/3540	5.80/7.54	2.5		
	12.5	7	112/156.8	2900/3540	6.77/8.80	2.5		
	12.5	8	128/179.2	2930/3540	7.73/10.05	2.5		
	12.5	9	144/201.6	2930/3540	8.70/11.28	2.5		
	12.5	10	160/224	2930/3540	9.67/12.57	2.5		
	12.5	11	176/246.4	2930/3540	10.63/13.79	2.5		
	12.5	12	192/268.8	2930/3540	11.60/15.08	2.5		
	12.5	13	208/291.2	2930/3540	12.57/16.30	2.5		
	12.5	14	224/313.6	2930/3540	13.53/17.60	2.5		

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL12.5/18	16	2	27/37.8	2840/3490	2.43/3.61	2.8	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	16	3	40/56	2870/3500	3.64/4.74	2.8		
	16	4	54/75.6	2890/3520	4.86/6.31	2.8		
	16	5	67/93.8	2900/3520	6.07/7.89	2.8		
	16	6	80/112	2900/3540	7.29/9.47	2.8		
	16	7	94/131.6	2900/3540	8.50/11.05	2.8		
	16	8	107/149.8	2930/3540	9.72/12.63	2.8		
	16	9	121/169.4	2930/3540	10.93/14.21	2.8		
	16	10	134/187.6	2930/3540	12.15/15.79	2.8		
	16	11	147/205.8	2930/3540	13.36/17.37	2.8		
	16	12	161/225.4	2930/3540	14.58/18.95	2.8		
	16	13	174/243.6	2930/3540	15.79/20.53	2.8		
	16	14	187/261.8	2930/3540	17.01/22.11	2.8		

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余 量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL12. 5/18	18	2	32/44. 8	2870/3500	2. 73/3. 55	2. 8	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	18	3	48/67. 2	2890/3520	4. 09/5. 32	2. 8		
	18	4	64/89. 6	2900/3540	5. 45/7. 09	2. 8		
	18	5	80/112	2900/3540	6. 82/8. 86	2. 8		
	18	6	86/120. 4	2930/3540	8. 18/10. 64	2. 8		
	18	7	112/156. 8	2930/3540	9. 54/12. 41	2. 8		
	18	8	128/179. 2	2930/3540	10. 90/14. 18	2. 8		
	18	9	144/201. 6	2930/3540	12. 27/15. 95	2. 8		
	18	10	160/224	2930/3550	13. 64/17. 73	2. 8		
	18	11	176/246. 4	2930/3550	15. 00/19. 5	2. 8		
	18	12	192/268. 8	2930/3550	16. 36/21. 27	2. 8		
	18	13	208/291. 2	2940/3560	17. 73/23. 05	2. 8		
	18	14	224/313. 6	2940/3560	19. 09/24. 82	2. 8		

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余 量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL12. 5/18	24	2	26/36. 4	2870/3500	3. 68/4. 78	3. 6	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	24	3	39/54. 6	2890/3520	5. 52/7. 17	3. 6		
	24	4	52/72. 8	2900/3540	7. 36/9. 56	3. 6		
	24	5	65/91	2900/3540	9. 20/11. 95	3. 6		
	24	6	78/109. 2	2930/3540	11. 03/14. 34	3. 6		
	24	7	91/127. 4	2930/3540	12. 87/16. 74	3. 6		
	24	8	104/145. 6	2930/3540	14. 71/19. 13	3. 6		
	24	9	117/163. 8	2930/3540	16. 55/21. 52	3. 6		
	24	10	130/182	2930/3550	18. 39/23. 91	3. 6		
	24	11	143/200. 2	2930/3550	20. 23/26. 30	3. 6		
	24	12	156/218. 4	2930/3550	22. 07/28. 69	3. 6		
	24	13	169/236. 6	2940/3560	23. 91/31. 08	3. 6		
	24	14	182/254. 8	2940/3560	25. 75/33. 47	3. 6		

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head(m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH) r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL25/45	25	2	32/44	2870/3500	3.84/4.92	2.3	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	25	3	48/67	2900/3520	5.76/7.44	2.3		
	25	4	64/89	2900/3520	7.68/9.96	2.3		
	25	5	80/112	2930/3540	9.60/12.48	2.3		
	25	6	96/134	2930/3540	11.52/14.88	2.3		
	25	7	112/156	2930/3540	13.44/17.4	2.3		
	25	8	128/179	2930/3540	15.36/19.92	2.3		
	25	9	144/201	2930/3540	17.28/22.44	2.3		
	25	10	160/224	2940/3550	19.20/24.96	2.3		
	25	11	176	2940	21.12	2.3		
	25	12	192	2950	23.04	2.3		
	25	13	208	2950	24.96	2.3		
	25	14	224	2950	26.88	2.3		

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head(m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH) r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL25/45	30	2	30/42	2870/3500	4.60/5.89	2.3	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	30	3	45/63	2900/3520	6.90/8.91	2.3		
	30	4	60/84	2900/3520	9.20/8.91	2.3		
	30	5	75/105	2930/3540	11.49/14.94	2.3		
	30	6	90/126	2930/3540	13.79/17.82	2.3		
	30	7	105/147	2930/3540	16.09/20.83	2.3		
	30	8	120/168	2930/3540	18.39/23.85	2.3		
	30	9	135/189	2930/3540	20.69/26.87	2.3		
	30	10	150/210	2940/3550	22.99/29.89	2.3		
	30	11	165	2940	25.29	2.3		
	30	12	180	2950	27.59	2.3		
	30	13	195	2950	29.89	2.3		
	30	14	210	2950	32.18	2.3		

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head(m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH) r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL25/45	36	2	26/36	2870/3500	5.33/6.83	2.3	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	36	3	39/54	2900/3520	8.00/10.33	2.3		
	36	4	52/72	2900/3520	10.67/13.83	2.3		
	36	5	65/91	2930/3540	13.33/17.33	2.3		
	36	6	78/109	2930/3540	16.00/20.67	2.3		
	36	7	91/127	2930/3540	18.67/24.17	2.3		
	36	8	104/145	2930/3540	21.33/27.67	2.3		
	36	9	117/163	2930/3540	24.00/31.17	2.3		
	36	10	130/182	2940/3550	26.67/34.67	2.3		
	36	11	143	2940	29.33	2.3		
	36	12	156	2950	32.00	2.3		
	36	13	169	2950	34.67	2.3		
	36	14	182	2950	37.33	2.3		

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head(m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH) r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL25/45	42	2	32/44	2900/3520	6.12/7.84	2.3	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	42	3	48/67	2930/3540	9.18/11.86	2.3		
	42	4	64/89	2930/3540	12.24/15.87	2.3		
	42	5	80/112	2930/3540	15.30/19.89	2.3		
	42	6	96/134	2930/3540	18.36/23.72	2.3		
	42	7	112/156	2940/3550	21.42/27.73	2.3		
	42	8	128/179	2950/3560	24.48/31.75	2.3		
	42	9	144/201	2950/3560	27.54/35.77	2.3		
	42	10	160/224	2950/3560	30.60/39.78	2.3		
	42	11	176	2950	33.66	2.3		
	42	12	192	2950	36.72	2.3		

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head(m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH) r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL25/45	50	2	27/37	2900/3520	7.17/9.18	2.5	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	50	3	40.5/56	2930/3540	10.75/13.89	2.5		
	50	4	54/75	2930/3540	14.34/18.59	2.5		
	50	5	67.5/94	2930/3540	17.92/23.30	2.5		
	50	6	81/113	2930/3540	21.50/27.78	2.5		
	50	7	94.5/132	2940/3550	25.09/32.48	2.5		
	50	8	108/151	2950/3560	28.67/37.19	2.5		
	50	9	121.5/170	2950/3560	32.26/41.89	2.5		
	50	10	135/189	2950/3560	35.84/46.59	2.5		
	50	11	148.5	2950	39.43	2.5		
	50	12	162	2950	43.01	2.5		

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head(m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH) r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL90/120	60	1	17/23	2870/3500	5.29/6.88	2.5	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	60	2	34/47	2930/3540	10.58/13.76	2.5		
	60	3	51/71	2930/3540	15.87/20.63	2.5		
	60	4	68/95	2930/3540	21.16/27.51	2.5		
	60	5	85/119	2950/3550	26.46/34.39	2.5		
	60	6	102/142	2950/3560	31.74/41.27	2.5		
	60	7	119/166	2950/3560	37.04/48.15	2.5		
	60	8	136/190	2950/3560	42.33/55.03	2.5		
	60	9	153/214	2950/3560	47.62/61.90	2.5		
	60	10	170	2970	52.91	2.5		

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH) r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL90/120	72	1	14/19	2870/3500	6.25/8.13	2.5	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	72	2	28/39	2930/3540	12.50/6.25	2.5		
	72	3	42/58	2930/3540	18.75/24.38	2.5		
	72	4	56/78	2930/3540	25.00/32.50	2.5		
	72	5	70/98	2950/3550	31.25/40.63	2.5		
	72	6	84/117	2950/3560	37.50/48.75	2.5		
	72	7	98/137	2950/3560	43.75/56.88	2.5		
	72	8	110/154	2950/3560	50.00/65.00	2.5		
	72	9	124/173	2950/3560	56.25/73.13	2.5		
	72	10	140	2970	62.50	2.5		

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head(m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH) r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL90/120	90	1	22.5/31.5	2930/3540	7.81/10.16	2.5	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	90	2	45/63	2930/3540	15.63/20.31	2.5		
	90	3	67.5/94.5	2950/3560	23.44/30.47	2.5		
	90	4	90/126	2950/3560	31.25/40.63	2.5		
	90	5	112.5/157.5	2970/3570	37.90/49.20	2.5		
	90	6	135/189	2970/3570	45.50/59.10	2.5		

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head(m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH) r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL90/120	108	1	18.5/26	2930/3540	9.10/11.80	2.5	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	108	2	37/52	2930/3540	18.10/23.60	2.5		
	108	3	55.5/78	2950/3560	27.30/35.50	2.5		
	108	4	74/103	2950/3560	36.40/47.30	2.5		
	108	5	92.5/129	2970/3570	45.50/59.01	2.5		
	108	6	111/155	2970/3570	54.50/59.01	2.5		

型号 Type	流量 Capacity (m ³ /h)	级数 Series	扬程 Head(m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH) r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL90/120	120	1	14/19.5	2930/3540	10.10/13.10	2.5	HT200 QT450 SUS304 SUS306L	JS24PTB00346
	120	2	28/39	2930/3540	20.20/26.30	2.5		
	120	3	42/58.5	2950/3560	30.30/39.40	2.5		
	120	4	56/78	2950/3560	40.40/52.50	2.5		
	120	5	70/97.5	2970/3570	50.50/65.70	2.5		
	120	6	84/117	2970/3570	60.60/78.80	2.5		

2、DL-CM 系列磁力联轴器多级船用离心泵

DL-CM Series magnetic couplings multistage marine centrifugal pump

洁冠®
JIEGUAN


SINCE 2010

The member of China
association of the
national shipbuilding Industry


MID:CT187

WWW.PACIFICOCEANPUMP.COM

洁冠®
JIEGUAN

“
DL-CM 磁力联轴器
多级船用离心泵
DL-CM Series magnetic
couplings multistage
marine centrifugal
PUMP”

适用于任何以甲醇为燃料的船舶,
节能、可靠
For any vessel with methanol
as fuel,energy efficient、reliable



张家港市太平洋泵业制造有限公司
ZHANGJIAGANG PACIFIC PUMP MANUFACTURING CO., LTD.

选型数据表 Selection data sheet

型号 Type	级数 Series	流量 Capacity (m ³ /h)	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	输出扭矩 Torque (N.m)	必需汽蚀余量 NPSHr (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL-CM 2.4/4	6	2.4/2.9	48/67	2840/3470	0.75/1.26	3.69/6.05	2	SUS304 SUS306L	JS24PTB00346
	7	2.4/2.9	56/78	2845/3470	0.87/1.47	5.04/6.05	2		
	8	2.4/2.9	64/89	2845/3470	1.00/1.67	5.04/6.05	2		
	9	2.4/2.9	72/100	2845/3490	1.11/1.88	5.04/8.21	2		
	10	2.4/2.9	80/112	2845/3490	1.24/2.11	5.04/8.21	2		
	11	2.4/2.9	88/123	2845/3490	1.36/2.31	7.38/8.21	2		
	12	2.4/2.9	96/134	2845/3500	1.49/2.52	7.38/10.91	2		
	13	2.4/2.9	104/145	2845/3500	1.61/2.73	7.38/10.91	2		
	14	2.4/2.9	112/156	2860/3500	1.73/2.93	10.02/10.91	2		
	15	2.4/2.9	120/168	2860/3500	1.86/3.16	10.02/10.91	2		
	16	2.4/2.9	128/179	2860/3520	1.98/3.37	10.02/14.92	2		
	17	2.4/2.9	136/190	2860/3520	2.10/3.57	10.02/14.92	2		
	18	2.4/2.9	144/200	2860/3520	2.23/3.76	10.02/14.92	2		
	19	2.4/2.9	152/212	2860/3520	2.35/3.99	10.02/14.92	2		
	20	2.4/2.9	160/224	2870/3520	2.48/4.21	13.31/14.92	2		
	21	2.4/2.9	168/235	2870/3520	2.60/4.42	13.31/20.35	2		
	22	2.4/2.9	176/246	2870/3520	2.72/4.63	13.31/20.35	2		
DL-CM 2.4/4	6	3/3.6	51/71	2845/3470	0.89/1.48	5.04/6.05	2	SUS304 SUS306L	JS24PTB00346
	7	3/3.6	60/83	2845/3490	1.04/1.73	5.04/8.21	2		
	8	3/3.6	68/95	2845/3490	1.19/1.98	5.04/8.21	2		
	9	3/3.6	77/107	2845/3490	1.33/2.23	7.38/8.21	2		
	10	3/3.6	85/119	2845/3500	1.48/2.48	7.38/10.91	2		
	11	3/3.6	94/130	2845/3500	1.63/2.71	7.38/10.91	2		
	12	3/3.6	102/142	2860/3500	1.78/2.96	10.02/10.91	2		
	13	3/3.6	110/154	2860/3520	1.93/3.21	10.02/14.92	2		
	14	3/3.6	119/166	2860/3520	2.08/3.46	10.02/14.92	2		
	15	3/3.6	127/177	2860/3520	2.23/3.69	10.02/14.92	2		
	16	3/3.6	136/190	2860/3520	2.37/3.97	10.02/14.92	2		
	17	3/3.6	144/201	2870/3520	2.52/4.20	13.31/14.92	2		
	18	3/3.6	153/214	2870/3520	2.67/4.47	13.31/20.35	2		
	19	3/3.6	161/225	2870/3520	2.82/4.70	13.31/20.35	2		
	20	3/3.6	170/238	2870/3520	2.97/4.97	13.31/20.35	2		
	21	3/3.6	178/249	2870/3520	3.12/5.20	13.31/20.35	2		
	22	3/3.6	187/261	2870/3520	3.27/5.45	13.31/20.35	2		

型号 Type	级数 Series	流量 Capacity (m ³ /h)	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	输出扭矩 Torque (N. m)	必需汽蚀 余量 NPSHr (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL-CM 2. 4/4	6	4/4.8	48/67	2845/3490	1.11/1.86	5.04/8.21	2	SUS304 SUS306L	JS24PTB00346
	7	4/4.8	56/78	2845/3490	1.29/2.17	7.38/8.21	2		
	8	4/4.8	64/89	2845/3500	1.48/2.48	7.38/10.91	2		
	9	4/4.8	72/100	2845/3500	1.67/2.78	7.38/10.91	2		
	10	4/4.8	80/112	2860/3500	1.85/3.12	10.02/10.91	2		
	11	4/4.8	88/123	2860/3520	2.04/3.42	10.02/14.92	2		
	12	4/4.8	96/134	2860/3520	2.22/3.73	10.02/14.92	2		
	13	4/4.8	104/145	2860/3520	2.41/4.04	10.02/14.92	2		
	14	4/4.8	112/156	2870/3520	2.59/4.34	13.31/14.92	2		
	15	4/4.8	120/168	2870/3520	2.78/4.68	13.31/14.92	2		
	16	4/4.8	128/179	2870/3520	2.97/4.98	13.31/20.35	2		
	17	4/4.8	136/190	2870/3520	3.15/5.29	13.31/20.35	2		
	18	4/4.8	144/201	2900/3520	3.34/5.59	18.11/20.35	2		
	19	4/4.8	152/212	2900/3520	3.52/5.90	18.11/20.35	2		
	20	4/4.8	160/224	2900/3520	3.71/6.23	18.11/20.35	2		
	21	4/4.8	168/235	2900/3520	3.89/6.54	18.11/29.68	2		
	22	4/4.8	176/246	2900/3540	4.08/6.85	18.11/29.68	2		
DL-CM 2. 4/4	6	5/6	45/63	2845/3490	1.25/2.10	7.38/8.21	2	SUS304 SUS306L	JS24PTB00346
	7	5/6	52/72	2845/3500	1.45/2.40	7.38/10.91	2		
	8	5/6	60/84	2860/3500	1.67/2.81	10.02/10.91	2		
	9	5/6	68/94	2860/3500	1.89/3.14	10.02/10.91	2		
	10	5/6	75/105	2860/3520	2.09/3.50	10/02/14.92	2		
	11	5/6	83/115	2860/3520	2.31/3.84	10.02/14.92	2		
	12	5/6	90/126	2870/3520	2.50/4.20	13.31/14.92	2		
	13	5/6	97/135	2870/3520	2.70/4.50	13.31/14.92	2		
	14	5/6	105/147	2890/3520	2.92/4.90	13.31/20.35	2		
	15	5/6	112/156	2890/3520	3.11/5.20	13.31/20.35	2		
	16	5/6	120/168	2900/3520	3.34/5.61	18.11/20.35	2		
	17	5/6	127/177	2900/3520	3.53/5.91	18.11/20.35	2		
	18	5/6	135/189	2900/3540	3.75/6.31	18.11/29.68	2		
	19	5/6	142/198	2900/3540	3.95/6.61	18.11/29.68	2		
	20	5/6	150/210	2900/3540	4.17/7.01	18.11/29.68	2		
	21	5/6	157/219	2900/3540	4.37/7.31	18.11/29.68	2		
	22	5/6	165/231	2915/3540	4.59/7.71	24.57/29.68	2		

型号 Type	级数 Series	流量 Capacity (m³/h)	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	输出扭矩 Torque (N. m)	必需汽蚀 余量 NPSHr (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL-CM 6/12	2	6/7.2	18/26	2840/3470	0.59/0.99	3.69/4.13	2	SUS304 SUS306L	JS24PTB00346
	3	6/7.2	27/38	2845/3470	0.88/1.45	5.04/6.05	2		
	4	6/7.2	36/51	2845/3470	1.17/1.95	5.04/8.21	2		
	5	6/7.2	45/63	2845/3470	1.47/2.40	7.38/8.21	2		
	6	6/7.2	54/76	2860/3500	1.77/2.90	10.02/10.91	2		
	7	6/7.2	63/88	2860/3500	2.06/3.36	10.02/10.91	2		
	8	6/7.2	72/101	2860/3520	2.35/3.85	10.02/14.92	2		
	9	6/7.2	81/113	2870/3520	2.64/4.31	13.31/14.92	2		
	10	6/7.2	90/126	2870/3520	2.94/4.81	13.31/14.92	2		
	11	6/7.2	99/139	2870/3520	3.24/5.30	13.31/20.35	2		
	12	6/7.2	108/151	2900/3520	3.53/5.76	18.11/20.35	2		
	13	6/7.2	117/164	2900/3520	3.83/6.26	18.11/20.35	2		
	14	6/7.2	126/177	2900/3520	4.12/6.75	18.11/20.35	2		
	15	6/7.2	135/189	2900/3540	4.41/7.21	18.11/29.68	2		
	16	6/7.2	144/202	2900/3540	4.71/7.71	18.11/29.68	2		
	17	6/7.2	153/214	2915/3540	5.00/8.16	24.57/29.68	2		
	18	6/7.2	162/227	2915/3540	5.30/8.66	24.57/29.68	2		
	19	6/7.2	171/240	2915/3540	5.59/9.16	24.57/29.68	2		
	20	6/7.2	180/252	2915/3540	5.89/9.61	24.57/29.68	2		
	21	6/7.2	189/265	2915/3540	6.18/10.10	24.57/40.47	2		
	22	6/7.2	198/277	2930/3540	6.47/10.57	35.85/40.47	2		
DL-CM 6/12	2	8/9.6	16/23	2840/3470	0.67/1.16	3.69/4.13	2	SUS304 SUS306L	JS24PTB00346
	3	8/9.6	24/34	2845/3490	1.01/1.71	5.04/8.21	2		
	4	8/9.6	32/45	2845/3490	1.34/2.26	7.38/8.21	2		
	5	8/9.6	40/56	2845/3500	1.68/2.82	7.38/10.91	2		
	6	8/9.6	48/67	2860/3520	2.01/3.37	10.02/14.92	2		
	7	8/9.6	56/78	2860/3520	2.35/3.92	10.02/14.92	2		
	8	8/9.6	64/90	2870/3520	2.68/4.53	13.31/14.92	2		
	9	8/9.6	72/101	2870/3520	3.02/5.08	13.31/20.35	2		
	10	8/9.6	80/112	2890/3520	3.35/5.63	18.11/20.35	2		
	11	8/9.6	88/123	2890/3520	3.69/6.19	18.11/20.35	2		
	12	8/9.6	96/134	2890/3540	4.02/6.75	18.11/29.68	2		
	13	8/9.6	104/146	2900/3540	4.36/7.34	18.11/29.68	2		
	14	8/9.6	112/157	2900/3540	4.70/7.90	18.11/29.68	2		
	15	8/9.6	120/168	2900/3540	5.03/8.45	24.57/29.68	2		
	16	8/9.6	128/179	2900/3540	5.37/9.00	24.57/29.68	2		
	17	8/9.6	136/195	2900/3540	5.70/9.81	24.57/40.47	2		
	18	8/9.6	144/202	2900/3540	6.04/10.16	24.57/40.47	2		
	19	8/9.6	152/213	2900/3540	6.37/10.71	24.57/40.47	2		
	20	8/9.6	160/224	2900/3540	6.71/11.27	24.57/40.47	2		
	21	8/9.6	168/235	2900/3540	7.04/11.82	35.85/40.47	2		
	22	8/9.6	173/242	2900/3540	7.25/12.17	35.85/40.47	2		

型号 Type	级数 Series	流量 Capacity (m³/h)	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	输出扭矩 Torque (N.m)	必需汽蚀 余量 NPSHr (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL-CM 6/12	2	10/12	14/19	2840/3470	0.72/1.17	3.69/4.13	2.3	SUS304 SUS306L	JS24PTB00346
	3	10/12	20/29	2845/3470	1.03/1.79	5.04/8.21	2.3		
	4	10/12	27/38	2845/3470	1.39/2.34	7.38/8.21	2.3		
	5	10/12	34/48	2845/3470	1.75/2.96	7.38/10.91	2.3		
	6	10/12	41/57	2860/3470	2.11/3.52	10.02/14.92	2.3		
	7	10/12	48/67	2860/3470	2.47/4.13	10.02/14.92	2.3		
	8	10/12	54/76	2870/3500	2.78/4.69	13.31/20.35	2.3		
	9	10/12	61/86	2870/3500	3.14/5.31	13.31/20.35	2.3		
	10	10/12	68/95	2900/3520	3.50/5.86	18.11/20.35	2.3		
	11	10/12	75/104	2900/3520	3.86/6.42	18.11/29.68	2.3		
	12	10/12	82/114	2900/3520	4.22/7.03	18.11/29.68	2.3		
	13	10/12	88/124	2900/3520	4.52/7.65	18.11/29.68	2.3		
	14	10/12	95/133	2915/3520	4.88/8.21	24.57/29.68	2.3		
	15	10/12	102/143	2915/3520	5.24/8.82	24.57/29.68	2.3		
	16	10/12	109/153	2915/3520	5.60/9.44	24.57/29.68	2.3		
	17	10/12	115/161	2915/3540	5.91/9.93	24.57/40.47	2.3		
	18	10/12	122/171	2930/3540	6.27/10.55	35.85/40.47	2.3		
	19	10/12	129/181	2930/3540	6.63/11.17	35.85/40.47	2.3		
	20	10/12	136/190	2930/3540	6.99/11.72	35.85/40.47	2.3		
	21	10/12	143/200	2930/3540	7.35/12.34	35.85/40.47	2.3		
	22	10/12	150/210	2930/3540	7.71/12.96	35.85/40.47	2.3		
DL-CM 12.5/18	2	12/14.4	36/50	2860/3520	2.18/3.70	10.02/14.92	2.3	SUS304 SUS306L	JS24PTB00346
	3	12/14.4	54/76	2870/3520	3.26/5.63	13.31/20.35	2.3		
	4	12/14.4	72/101	2900/3540	4.36/7.45	18.11/29.68	2.3		
	5	12/14.4	90/126	2915/3540	5.45/9.33	24.57/29.68	2.3		
	6	12/14.4	108/151	2930/3540	6.54/11.18	35.85/40.47	2.3		
	7	12/14.4	126/176	2930/3540	7.63/13.03	35.85/49.77	2.3		
	8	12/14.4	144/202	2930/3550	8.72/14.96	35.85/49.77	2.3		
	9	12/14.4	162/227	2930/3560	9.81/16.80	48.89/59.02	2.3		
	10	12/14.4	180/252	2930/3560	10.90/18.66	48.89/59.02	2.3		
	11	12/14.4	198/277	2930/3560	11.99/20.51	48.89/80.48	2.3		
	12	12/14.4	216/303	2930/3550	13.08/22.43	48.89/80.48	2.3		
	13	12/14.4	234/328	2945/3560	14.17/24.28	62.1/80.48	2.3		
	14	12/14.4	252/353	2950/3560	15.26/26.13	62.1/80.48	2.3		

型号 Type	级数 Series	流量 Capacity (m ³ /h)	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	输出扭矩 Torque (N.m)	必需汽蚀 余量 NPSHr (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL-CM 12.5/18	2	12.5/15	32/45	2860/3520	2.02/3.41	10.02/14.92	2.5	SUS304 SUS306L	JS24PTB00346
	3	12.5/15	48/67	2870/3520	3.03/5.07	13.31/20.35	2.5		
	4	12.5/15	64/90	2900/3540	4.04/6.81	18.11/29.68	2.5		
	5	12.5/15	80/112	2915/3540	5.05/8.48	24.57/29.68	2.5		
	6	12.5/15	96/134	2915/3540	6.06/10.14	24.57/40.47	2.5		
	7	12.5/15	112/157	2930/3540	7.06/11.88	35.85/40.47	2.5		
	8	12.5/15	128/180	2930/3550	8.07/13.62	35.85/49.77	2.5		
	9	12.5/15	144/202	2930/3550	9.08/15.29	35.85/49.77	2.5		
	10	12.5/15	160/224	2930/3560	10.09/16.95	48.89/59.02	2.5		
	11	12.5/15	176/246	2930/3560	11.10/18.62	48.89/59.02	2.5		
	12	12.5/15	192/269	2930/3560	12.11/20.36	48.89/80.48	2.5		
	13	12.5/15	208/291	2930/3560	13.12/22.03	62.1/80.48	2.5		
	14	12.5/15	224/314	2930/3560	14.13/23.77	62.1/80.48	2.5		
	14	12.5/15	224/314	2930/3560	14.13/23.77	62.1/80.48	2.5		
DL-CM 12.5/18	2	16/19	27/38	2860/3520	2.14/3.57	10.02/14.92	2.5	SUS304 SUS306L	JS24PTB00346
	3	16/19	40/56	2870/3520	3.17/5.27	13.31/20.35	2.5		
	4	16/19	54/76	2900/3540	4.28/7.15	18.11/29.68	2.5		
	5	16/19	67/94	2915/3540	5.31/8.85	24.57/29.68	2.5		
	6	16/19	80/112	2915/3540	6.34/10.54	24.57/40.47	2.5		
	7	16/19	94/132	2930/3540	7.45/12.43	35.85/40.47	2.5		
	8	16/19	107/150	2930/3550	8.48/14.12	35.85/49.77	2.5		
	9	16/19	121/170	2930/3550	9.59/16.00	35.85/49.77	2.5		
	10	16/19	134/188	2930/3560	10.62/17.70	48.89/59.02	2.5		
	11	16/19	147/206	2930/3560	11.65/19.39	48.89/80.48	2.5		
	12	16/19	161/225	2930/3560	12.76/21.18	48.89/80.48	2.5		
	13	16/19	174/244	2930/3560	13.79/22.97	62.1/80.48	2.5		
	14	16/19	187/262	2930/3560	14.82/24.66	62.1/80.48	2.5		
	14	16/19	187/262	2930/3560	14.82/24.66	62.1/80.48	2.5		
DL-CM 12.5/18	2	18/22	32/45	2870/3520	2.80/4.82	13.31/20.35	2.5	SUS304 SUS306L	JS24PTB00346
	3	18/22	48/67	2900/3540	4.20/7.18	18.11/29.68	2.5		
	4	18/22	64/90	2915/3540	5.61/9.63	24.57/29.68	2.5		
	5	18/22	80/112	2930/3540	7.01/11.99	35.85/40.47	2.5		
	6	18/22	86/121	2930/3540	7.53/12.95	35.85/40.47	2.5		
	7	18/22	112/157	2930/3560	9.81/16.81	48.89/59.02	2.5		
	8	18/22	128/179	2930/3560	11.21/19.16	48.89/59.02	2.5		
	9	18/22	144/202	2930/3560	12.61/21.62	48.89/80.48	2.5		
	10	18/22	160/224	2930/3560	14.01/23.98	62.1/80.48	2.5		
	11	18/22	176/246	2930/3560	15.41/26.33	62.1/80.48	2.5		
	12	18/22	192/269	2945/3560	16.82/28.80	71.34/98.98	2.5		
	13	18/22	208/291	2945/3560	18.22/31.15	71.34/98.98	2.5		
	14	18/22	224/314	2950/3580	19.62/33.61	97.12/120.04	2.5		
	14	18/22	224/314	2950/3580	19.62/33.61	97.12/120.04	2.5		

型号 Type	级数 Series	流量 Capacity (m³/h)	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	输出扭矩 Torque (N.m)	必需汽蚀余量 NPSHr (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL-CM 12.5/18	2	24/29	26/36	2870/3520	2.93/4.90	13.31/20.35	2.8	SUS304 SUS306L	JS24PTB00346
	3	24/29	39/55	2900/3540	4.40/7.49	18.11/29.68	2.8		
	4	24/29	52/73	2915/3540	5.86/9.95	24.57/40.47	2.8		
	5	24/29	65/91	2930/3540	7.33/12.40	35.85/40.47	2.8		
	6	24/29	78/110	2930/3550	8.79/14.99	35.85/49.77	2.8		
	7	24/29	91/127	2930/3560	10.26/17.30	48.89/59.02	2.8		
	8	24/29	104/146	2930/3560	11.73/19.89	48.89/80.48	2.8		
	9	24/29	117/164	2930/3560	13.19/22.34	62.1/80.48	2.8		
	10	24/29	130/182	2930/3560	14.66/24.80	62.1/80.48	2.8		
	11	24/29	143/200	2945/3570	16.12/27.25	71.34/98.98	2.8		
	12	24/29	156/218	2945/3570	17.58/29.70	71.34/98.98	2.8		
	13	24/29	169/237	2945/3570	19.05/32.29	71.34/98.98	2.8		
	14	24/29	182/255	2950/3580	20.52/34.74	97.12/120.04	2.8		
DL-CM 25/45	2	25/30	32/44	2900/3540	3.76/6.20	18.11/29.68	2.8	SUS304 SUS306L	JS24PTB00346
	3	25/30	48/67	2915/3540	5.64/9.44	24.57/40.47	2.8		
	4	25/30	64/89	2930/3540	7.52/12.54	35.85/40.47	2.8		
	5	25/30	80/112	2930/3550	9.40/15.79	48.89/49.77	2.8		
	6	25/30	96/134	2930/3560	11.28/18.89	48.89/59.02	2.8		
	7	25/30	112/156	2930/3560	13.15/21.99	62.1/80.48	2.8		
	8	25/30	128/179	2930/3560	15.03/25.23	62.1/80.48	2.8		
	9	25/30	144/201	2945/3570	16.91/28.33	71.34/98.98	2.8		
	10	25/30	160/224	2945/3570	18.79/31.57	71.34/98.98	2.8		
	11	25	176	2950	20.67	97.12	2.8		
	12	25	192	2950	22.55	97.12	2.8		
	13	25	208	2950	24.43	97.12	2.8		
	14	25	224	2950	26.31	97.12	2.8		
DL-CM 25/45	2	30/36	30/42	2900/3540	4.15/6.98	18.11/29.68	3.0	SUS304 SUS306L	JS24PTB00346
	3	30/36	45/63	2930/3540	6.23/10.47	35.85/40.47	3.0		
	4	30/36	60/84	2930/3550	8.31/13.97	35.85/49.77	3.0		
	5	30/36	75/105	2930/3560	10.39/17.46	48.89/59.02	3.0		
	6	30/36	90/126	2930/3560	12.47/20.95	48.89/80.48	3.0		
	7	30/36	105/147	2930/3560	14.55/24.44	62.1/80.48	3.0		
	8	30/36	120/168	2945/3570	16.63/27.93	71.34/98.98	3.0		
	9	30/36	135/189	2945/3570	18.70/31.42	71.34/98.98	3.0		
	10	30/36	150/210	2950/3580	20.78/34.91	97.12/120.04	3.0		
	11	30	165	2950	22.86	97.12	3.0		
	12	30	180	2950	24.94	97.12	3.0		
	13	30	195	2955	27.02	119.58	3.0		
	14	30	210	2955	29.10	119.58	3.0		

型号 Type	级数 Series	流量 Capacity (m ³ /h)	扬程 Head(m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	输出扭矩 Torque (N.m)	必需汽蚀 余量 NPSHr (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL-CM 25/45	2	36/43	26/36	2900/3540	4.25/7.03	18.11/29.68	3.0	SUS304 SUS306L	JS24PTB00346
	3	36/43	39/54	2930/3540	6.38/10.54	35.85/40.47	3.0		
	4	36/43	52/72	2930/3550	8.50/14.06	35.85/49.77	3.0		
	5	36/43	65/91	2930/3560	10.63/17.77	48.89/59.02	3.0		
	6	36/43	78/109	2930/3560	12.75/21.28	48.89/80.48	3.0		
	7	36/43	91/127	2930/3560	14.88/24.80	62.1/80.48	3.0		
	8	36/43	104/145	2930/3570	17.00/28.31	62.1/98.98	3.0		
	9	36/43	117/163	2945/3570	19.12/31.83	71.34/98.98	3.0		
	10	36/43	130/182	2950/3580	21.25/35.54	97.12/120.04	3.0		
	11	36	143	2950	23.38	97.12	3.0		
	12	36	156	2950	25.50	97.12	3.0		
	13	36	169	2955	27.63	119.58	3.0		
	14	36	182	2955	29.75	119.58	3.0		
DL-CM 25/45	2	42/50	32/44	2915/3540	6.00/9.83	24.57/40.47	3.0	SUS304 SUS306L	JS24PTB00346
	3	42/50	48/67	2930/3550	9.01/14.96	35.85/49.77	3.0		
	4	42/50	64/89	2930/3560	12.01/19.88	48.89/80.48	3.0		
	5	42/50	80/112	2930/3560	15.01/25.01	62.1/80.48	3.0		
	6	42/50	96/134	2945/3570	18.01/29.93	71.34/98.98	3.0		
	7	42/50	112/156	2950/3580	21.01/34.84	97.12/120.04	3.0		
	8	42/50	128/179	2950/3580	24.01/39.98	97.12/146.72	3.0		
	9	42/50	144/201	2955/35800	27.01/44.89	119.58/146.7	3.0		
	10	42/50	160/224	2955/3580	30.01/50.02	119.58/200.0	3.0		
	11	42	176	2960	33.02	145.19	3.0		
	12	42	192	2960	36.02	145.19	3.0		
DL-CM 25/45	2	50/60	27/37	2915/3540	5.93/9.76	24.57/40.47	3.5	SUS304 SUS306L	JS24PTB00346
	3	50/60	41/56	2930/3550	9.01/14.77	35.85/49.77	3.5		
	4	50/60	54/75	2930/3560	11.87/19.78	48.89/80.48	3.5		
	5	50/60	68/94	2930/3560	14.94/24.79	62.1/80.48	3.5		
	6	50/60	81/113	2945/3570	17.80/29.80	71.34/98.98	3.5		
	7	50/60	95/132	2940/3580	20.88/34.81	97.12/120.04	3.5		
	8	50/60	108/151	2950/3580	23.73/39.82	97.12/120.04	3.5		
	9	50/60	122/170	2950/3580	26.81/44.83	97.12/146.72	3.5		
	10	50/60	135/189	2950/3580	29.67/49.84	119.58/200.0	3.5		
	11	50	149	2955	32.74	119.58	3.5		
	12	50	162	2960	35.60	145.19	3.5		

型号 Type	级数 Series	流量 Capacity (m ³ /h)	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	输出扭矩 Torque (N.m)	必需汽蚀余 量 NPSHr (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL-CM 90/120	1	60/72	17/23	2900/3540	4.41/7.16	18.11/29.68	3.5	SUS304 SUS306L	JS24PTB00346
	2	60/72	34/47	2930/3550	8.82/14.64	35.85/49.77	3.5		
	3	60/72	51/71	2930/3560	13.23/22.11	62.1/80.48	3.5		
	4	60/72	68/95	2945/3570	17.65/29.58	71.34/98.98	3.5		
	5	60/72	85/11	2950/3580	22.06/37.06	97.12/120.04	3.5		
	6	60/72	102/1	2950/3580	26.47/44.22	97.12/146.72	3.5		
	7	60/72	119/1	2955/3580	30.88/51.69	119.58/200.07	3.5		
	8	60/72	136/1	2960/3580	35.29/59.17	145.19/200.07	3.5		
	9	60/72	153/2	2960/3580	39.70/66.64	145.19/200.07	3.5		
	10	60	170	2960	44.12	177.45	3.5		
DL-CM 90/120	1	72/86	14/19	2915/3540	4.36/7.07	24.57/29.68	4.0	SUS304 SUS306L	JS24PTB00346
	2	72/86	28/39	2930/3550	8.72/14.51	35.85/49.77	4.0		
	3	72/86	42/58	2930/3560	13.08/21.57	62.1/80.48	4.0		
	4	72/86	56/78	2945/3570	17.44/29.01	71.34/98.98	4.0		
	5	72/86	70/98	2950/3580	21.80/36.45	97.12/120.04	4.0		
	6	72/86	84/11	2950/3580	26.16/43.52	97.12/146.72	4.0		
	7	72/86	98/13	2955/3580	30.52/50.96	119.58/200.07	4.0		
	8	72/86	110/1	2955/3580	34.25/57.28	119.58/200.07	4.0		
	9	72/86	124/1	2960/3580	38.61/64.35	145.19/200.07	4.0		
	10	72	140	2960	43.60	177.45	4.0		
DL-CM 90/120	1	90/108	23/32	2930/3550	8.68/14.49	35.85/49.77	5.0	SUS304 SUS306L	JS24PTB00346
	2	90/108	45/63	2945/3570	16.98/28.52	71.34/98.98	5.0		
	3	90/108	68/95	2950/3580	25.65/43.01	97.12/146.72	5.0		
	4	90/108	90/12	2960/3580	33.96/57.04	145.19/200.07	5.0		
	5	90/108	113/158	2960/3580	42.63/71.53	177.45/240.08	5.0		
	6	90/108	135/1	2965/3580	50.93/85.57	241.57/293.44	5.0		
DL-CM 90/120	1	108/130	19/26	2930/3550	8.60/14.16	35.85/49.77	5.5	SUS304 SUS306LL	JS24PTB00346
	2	108/130	37/52	2945/3570	16.75/28.34	71.34/98.98	5.5		
	3	108/130	56/78	2950/3580	25.35/42.50	97.12/146.72	5.5		
	4	108/130	74/10	2955/3580	33.50/56.13	145.19/200.07	5.5		
	5	108/130	93/12	2960/3580	42.10/70.30	177.45/240.08	5.5		
	6	108/130	111/1	2960/3580	50.25/84.47	177.45/293.44	5.5		
DL-CM 90/120	1	120/144	14/20	2930/3540	6.94/11.89	35.85/40.47	6.0	SUS304 SUS306L	JS24PTB00346
	2	120/144	28/39	2930/3560	13.87/23.18	62.1/80.48	6.0		
	3	120/144	42/59	2950/3580	20.80/35.08	97.12/120.04	6.0		
	4	120/144	56/78	2955/3580	27.74/46.37	119.58/146.72	6.0		
	5	120/144	70/98	2960/3580	34.68/58.26	145.19/200.07	6.0		
	6	120/144	84/11	2960/3580	41.62/69.56	177.45/240.08	6.0		

注：输出扭矩计算公式 $T=P*9550/n$

式中：P—功率，单位 KW；n—电机的额定转速，单位 r/min；T—转矩（扭矩），单位 N.m。

2、 G25-125 系列船用立式多级离心泵

G25-125 series marine vertical centrifugal pump

洁冠®
JIEGUAN

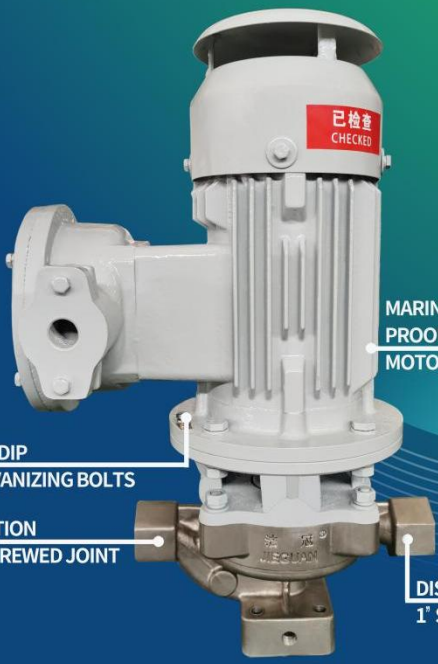

SINCE 2010

The member of China
association of the
national shipbuilding ldustry


MID:CT187

WWW.PACIFICOCEANPUMP.COM

G25-125 series
marine vertical centrifugal pump



MARINE EXPLOSION
PROOF/STANDARD
MOTOR

HOT DIP
GALVANIZING BOLTS

SUCTION
1" SCREWED JOINT

DISCHARGE
1" SCREWED JOINT

Nominal diameter	19mm to 25mm
Flow rate	Up to 10m3/h (44.03 US gpm)
Pressure	Up to 2bar (29psi)
Temperature	Up to 120°C (248°F)
Pumped liquid	Fresh/sea/oil-water
Installation	Vertical
Frequency	50 to 60 HZ
Motor	Standard and EX motor
Design life time	20years

张家港市太平洋泵业制造有限公司
ZHANGJIAGANG PACIFIC PUMP MANUFACTURING CO., LTD.

选型数据表 Selection data sheet

型号 Type	流量 Capacity (m³/h)	级数 Series	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH) r (m)	泵体材质 Pump body material	CCS 型式认可证书号 Approval No. of drawing
G25-125	2.8	1	20.6	2900	0.67	2.3	QT450-10	JS24PTB00346
	4	1	20	2900	0.47	2.3		
	5.2	1	18	2900	0.51	2.3		

3、 CISG 系列船用立式单级管道离心泵

CISG series marine vertical single stage pipeline centrifugal pump

洁冠[®]

JIEGUAN

ISO 9001

SINCE 2010

The member of China
association of the
national shipbuilding ldustry

ANSI

MID:CT187

WWW.PACIFICOCEANPUMP.COM

CISG series marine vertical
single stage pipeline centrifugal pump



Nominal diameter	25mm to 400mm
Flow rate	Up to 2000m ³ /h (8806 US gpm)
Pressure	Up to 6bar (87psi)
Temperature	Up to 120°C (248°F)
Pumped liquid	Fresh water sea water
Installation	Vertical
Frequency	50 to 60 HZ
Motor	Standard and EX motor
Design life time	20years

张家港市太平洋泵业制造有限公司

ZHANGJIAGANG PACIFIC PUMP MANUFACTURING CO., LTD.

23

选型数据表 Selection data sheet

型号 Type	流量 Capacity (m ³ /h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number																						
25-125	2.8	1	20.5	2900	0.52	2.3	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346																						
	4.0	1	20																											
	5.2	1	18																											
25-125A	2.5	1	17	2900	0.36	2.3			HT200 QT450-10 SUS304 SUS316L	JS24PTB00346																				
	3.6	1	16																											
	4.6	1	14.5																											
25-160	2.8	1	33	2900	1.10	2.3					HT200 QT450-10 SUS304 SUS316L	JS24PTB00346																		
	4.0	1	32																											
	5.2	1	30																											
25-160A	2.6	1	29	2900	0.86	2.3							HT200 QT450-10 SUS304 SUS316L	JS24PTB00346																
	3.7	1	28																											
	4.9	1	26																											
32-100	3.5	1	14.5	2900	0.33	2.3									HT200 QT450-10 SUS304 SUS316L	JS24PTB00346														
	4.5	1	12.5																											
	5.3	1	11																											
32-125	3.5	1	22	2900	0.64	2.3											HT200 QT450-10 SUS304 SUS316L	JS24PTB00346												
	5.0	1	20																											
	6.5	1	18																											
32-125A	3.1	1	17.6	2900	0.45	2.3													HT200 QT450-10 SUS304 SUS316L	JS24PTB00346										
	4.5	1	16																											
	5.8	1	14.4																											
32-160	4.4	1	28	2900	1.40	2.3															HT200 QT450-10 SUS304 SUS316L	JS24PTB00346								
	6.3	1	32																											
	8.3	1	30																											
32-160A	2.8	1	27	2900	0.75	2.0																	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346						
	4.0	1	25																											
	5.2	1	21																											
32-200	3.1	1	50.5	2900	2.40	2.0																			HT200 QT450-10 SUS304 SUS316L	JS24PTB00346				
	4.5	1	50																											
	5.8	1	48																											
32-200A	2.8	1	44.6	2900	1.80	2.0																					HT200 QT450-10 SUS304 SUS316L	JS24PTB00346		
	4.0	1	44																											
	5.2	1	42.7																											
40-100	4.4	1	13.2	2900	0.40	2.3																							HT200 QT450-10 SUS304 SUS316L	JS24PTB00346
	6.3	1	12.5																											
	8.3	1	11.3																											

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number												
40-100A	3.9	1	10.6	2900	0.36	2.3	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346												
	5.6	1	10																	
	7.4	1	9																	
40-125	4.4	1	21	2900	0.80	2.3														
	6.3	1	20																	
	8.3	1	18																	
40-125A	3.9	1	17.6	2900	0.50	2.3														
	5.6	1	16																	
	7.4	1	14.4																	
40-160	4.4	1	33	2900	1.40	2.3														
	6.3	1	32																	
	8.3	1	30																	
40-160A	4.1	1	29	2900	1.10	2.3														
	5.9	1	28																	
	7.8	1	26.3																	
40-160B	3.8	1	25.5	2900	0.80	2.3														
	5.5	1	24																	
	7.2	1	22.5																	
40-200	4.4	1	51	2900	2.90	2.3														
	6.3	1	50																	
	8.3	1	48																	
40-200A	4.1	1	45	2900	2.10	2.3														
	5.9	1	44																	
	7.8	1	42																	
40-200B	3.7	1	38	2900	1.60	2.3														
	5.3	1	36																	
	7.0	1	34.5																	
40-250	4.4	1	82	2900	5.00	2.3														
	6.3	1	80																	
	8.3	1	74																	
40-250A	4.1	1	72	2900	4.20	2.3														
	5.9	1	70																	
	7.8	1	65																	
40-250B	3.8	1	61.5	2900	3.40	2.3														
	5.5	1	60																	
	7.0	1	56																	
40-100(I)	8.8	1	13.2	2900	0.75	2.3														
	12.5	1	12.5																	
	16.3	1	11.3																	

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number												
40-100(I) A	8.0	1	10.6	2900	0.60	2.3	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346												
	11.0	1	10.0																	
	14.5	1	9.0																	
40-125(I)	8.8	1	21.2	2900	1.30	2.3														
	12.5	1	20.0																	
	16.3	1	17.8																	
40-125(I) A	8.0	1	17	2900	0.90	2.3														
	11.0	1	16																	
	14.5	1	14																	
40-160(I)	8.8	1	33	2900	2.10	2.3														
	12.5	1	32																	
	16.3	1	30																	
40-160(I) A	8.2	1	29	2900	1.70	2.3														
	11.7	1	28																	
	15.2	1	26																	
40-160(I) B	7.3	1	23	2900	1.20	2.3														
	10.4	1	22																	
	13.5	1	20.5																	
40-200(I)	8.8	1	51.2	2900	3.80	2.3														
	12.5	1	50																	
	16.3	1	48																	
40-200(I) A	8.3	1	45	2900	3.00	2.3														
	11.7	1	44																	
	15.3	1	42																	
40-200(I) B	7.5	1	37	2900	2.30	2.3														
	10.6	1	38																	
	13.8	1	34																	
40-250(I)	8.8	1	81.2	2900	7.30	2.3														
	12.5	1	80																	
	16.3	1	77.5																	
40-250(I) A	8.2	1	71	2900	5.70	2.3														
	11.6	1	71																	
	15.2	1	68																	
40-250(I) B	7.6	1	61.4	2900	5.00	2.3														
	10.8	1	60																	
	14	1	58																	
50-100	8.8	1	13.6	2900	0.80	2.3														
	12.5	1	12.5																	
	16.3	1	11.3																	

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number												
500-100A	8	1	11	2900	0.60	2.3	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346												
	11	1	10																	
	14.5	1	9																	
50-125	8.8	1	21.5	2900	1.30	2.3														
	12.5	1	20																	
	16.3	1	17.8																	
50-125A	8	1	17	2900	0.90	2.3														
	11	1	16																	
	14.5	1	14																	
50-160	8.8	1	33	2900	2.10	2.3														
	12.5	1	32																	
	16.3	1	30																	
50-160A	8.2	1	29	2900	1.70	2.3														
	11.7	1	28																	
	15.2	1	26																	
50-160B	7.3	1	23	2900	1.20	2.3														
	10.4	1	22																	
	13.5	1	20.5																	
50-200	8.8	1	52	2900	4.00	2.3														
	12.5	1	50																	
	16.3	1	48																	
50-200A	8.3	1	45.8	2900	3.00	2.3														
	11.7	1	44																	
	15.3	1	42																	
50-200B	7.5	1	37	2900	2.20	2.3														
	10.6	1	36																	
	13.8	1	34																	
50-250	8.8	1	82	2900	7.50	2.3														
	12.5	1	80																	
	16.3	1	77.5																	
50-250A	8.2	1	71.5	2900	5.60	2.3														
	11.6	1	70																	
	15.2	1	68																	
50-250B	7.6	1	61.4	2900	5.00	2.3														
	10.8	1	60																	
	14	1	58																	
50-100(I)	17.5	1	13.7	2900	1.50	2.5														
	25	1	12.5																	
	32.5	1	10.5																	

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number												
50-100(I) A	17.5	1	13.7	2900	1.50	2.5	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346												
	25	1	12.5																	
	32.5	1	10.5																	
50-125(I)	15.6	1	13	2900	1.10	2.5														
	22.3	1	10																	
	29	1	8.4																	
50-125(I) A	15.6	1	17	2900	1.80	2.5														
	22.3	1	16																	
	29	1	13.6																	
50-160(I)	17.5	1	34.4	2900	4.00	2.5														
	25	1	32																	
	32.5	1	27.5																	
50-160(I) A	16.4	1	30	2900	3.20	2.5														
	23.4	1	28																	
	30.4	1	24																	
50-160(I) B	15	1	26	2900	2.50	2.5														
	21.6	1	24																	
	28	1	20.6																	
50-200(I)	17.5	1	52.7	2900	6.00	2.5														
	25	1	50																	
	32.5	1	45.5																	
50-200(I) A	16.4	1	46.4	2900	5.00	2.5														
	23.5	1	44																	
	30.5	1	40																	
50-200(I) B	15.2	1	40	2900	4.00	2.5														
	21.8	1	38																	
	28.3	1	34.5																	
50-250(I)	17.5	1	82	2900	10.00	2.5														
	25	1	80																	
	32.5	1	76.5																	
50-250(I) A	16.4	1	71.5	2900	9.40	2.5														
	23.4	1	70																	
	30.5	1	67																	
50-250(I) B	15	1	61	2900	7.50	2.5														
	21.6	1	60																	
	28	1	57.4																	
50-315(I)	17.5	1	128	2900	22.00	2.5														
	25	1	125																	
	32.5	1	122																	

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number												
50-315(I)A	16.6	1	115	2900	19.00	2.5	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346												
	23.7	1	113																	
	31	1	110																	
50-315(I)B	15.7	1	103	2900	15.00	2.5														
	22.5	1	101																	
	29.2	1	98																	
65-100	17.5	1	13.7	2900	1.50	2.5														
	25	1	12.5																	
	32.5	1	10.5																	
65-100A	15.6	1	11	2900	1.10	2.5														
	22	1	10																	
	29	1	8.4																	
65-125	17.5	1	21.5	2900	2.40	2.5														
	25	1	20																	
	32.5	1	18																	
65-125A	15.6	1	17	2900	1.90	2.5														
	22.3	1	16																	
	29	1	14.4																	
65-160	17.5	1	34.4	2900	4.00	2.5														
	25	1	32																	
	32.5	1	27.5																	
65-160A	16.4	1	30	2900	3.20	2.5														
	23.4	1	28																	
	30.4	1	24																	
65-160B	15	1	26	2900	2.50	2.5														
	21.6	1	24																	
	28	1	20.6																	
65-200	17.5	1	52.7	2900	6.00	2.5														
	25	1	50																	
	32.5	1	45.5																	
65-200A	16.4	1	46.4	2900	5.00	2.5														
	23.5	1	44																	
	30.5	1	40																	
65-200B	15.2	1	40	2900	4.00	2.5														
	21.8	1	38																	
	28.3	1	34.5																	
65-250	17.5	1	82	2900	11.00	2.5														
	25	1	80																	
	32.5	1	76.5																	

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number												
65-250A	16.4	1	71.5	2900	8.50	2.5	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346												
	23.4	1	70																	
	30.5	1	67																	
65-250B	15	1	60	2900	7.50	2.5														
	21.6	1	61																	
	28	1	57.4																	
65-315	17.5	1	127	2900	22.00	2.5														
	25	1	125																	
	32.5	1	122																	
65-315A	16.6	1	115	2900	19.60	2.5														
	23.7	1	113																	
	31	1	110																	
65-315B	15.7	1	103	2900	15.00	2.5														
	22.5	1	101																	
	29.2	1	98																	
65-100(I)	35	1	13.8	2900	2.80	3.0														
	50	1	12.5																	
	65	1	10																	
65-100(I) A	31.3	1	11	2900	2.10	3.0														
	44.7	1	10																	
	58	1	8																	
65-125(I)	35	1	22	2900	4.50	3.0														
	50	1	20																	
	65	1	17																	
65-125(I)A	31.3	1	17.5	2900	3.30	3.0														
	45	1	16																	
	58	1	13.6																	
65-160(I)	35	1	35	2900	7.50	3.0														
	50	1	32																	
	65	1	28																	
65-160(I) A	32.7	1	62	2900	15.00	3.0														
	46.7	1	70																	
	61	1	69																	
65-160(I)B	30.3	1	26	2900	4.70	3.0														
	43.3	1	24																	
	56.3	1	21																	
60-200(I)	35	1	53.5	2900	12.00	3.0														
	50	1	50																	
	65	1	46																	

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number														
60-200(I) A	32.8	1	47	2900	9.20	3.0	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346														
	47	1	44																			
	61	1	40																			
60-200(I) B	30.5	1	40.6	2900	7.50	3.0																
	43.5	1	38																			
	56.6	1	33.4																			
65-250(I)	35	1	83	2900	18.00	3.0																
	50	1	80																			
	65	1	72																			
65-250(I) A	32.5	1	73	2900	15.00	3.0																
	46.7	1	70																			
	61	1	63																			
65-250(I) B	30	1	62	2900	12.00	3.0																
	43.3	1	60																			
	56	1	54																			
65-315(I)	35	1	128	2900	31.00	3.0																
	50	1	125																			
	65	1	121																			
65-315(I) A	32.5	1	112.6	2900	24.00	3.0																
	46.5	1	110																			
	60.5	1	106.4																			
65-315(I) B	31	1	102.5	2900	22.00	3.0																
	44.5	1	100																			
	58	1	98																			
80-100	35	1	13.8	2900	2.30	3.0																
	50	1	12.5																			
	65	1	10																			
80-100A	31.3	1	11	2900	1.70	3.0																
	44.7	1	10																			
	58	1	8																			
80-125	35	1	22	2900	4.50	3.0																
	50	1	20																			
	65	1	17																			
80-125A	31.3	1	17.5	2900	3.20	3.0																
	45	1	16																			
	58	1	13.6																			
80-160	35	1	35	2900	6.00	3.0																
	50	1	32																			
	65	1	28																			

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number												
80-160A	32.7	1	30.6	2900	6.00	3.0	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346												
	46.7	1	28																	
	61	1	24																	
80-160B	30.3	1	26	2900	4.60	3.0														
	43.3	1	24																	
	56.3	1	21																	
80-200	35	1	53.5	2900	11.00	3.0														
	50	1	50																	
	65	1	46																	
80-200A	32.8	1	47	2900	9.20	3.0														
	47	1	44																	
	61	1	40																	
80-200B	30.5	1	40.6	2900	7.50	3.0														
	43.5	1	38																	
	56.6	1	33.4																	
80-250	35	1	83	2900	18.00	3.0														
	50	1	80																	
	65	1	72																	
80-250A	32.5	1	73	2900	15.00	3.0														
	46.7	1	70																	
	61	1	63																	
80-250B	30	1	62	2900	11.60	3.0														
	43.3	1	60																	
	56	1	54																	
80-315	35	1	128	2900	31.00	3.0														
	50	1	125																	
	65	1	122																	
80-315A	32.5	1	112.6	2900	24.40	3.0														
	46.5	1	110																	
	60.5	1	107.4																	
80-315B	31	1	102.5	2900	21.00	3.0														
	44.5	1	100																	
	58	1	98																	
80-315C	29	1	98	2900	16.10	3.0														
	41.5	1	85																	
	36	1	83																	
80-350	35	1	146	2900	42.70	3.0														
	50	1	150																	
	65	1	142																	

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number		
80-350A	31	1	138.4	2900	37.40	3.0	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346		
	44.5	1	142							
	58	1	134.8							
80-350B	29	1	131.4	2900	30.80	3.0				
	41	1	135							
	53.6	1	127.8							
80-100(I)	70	1	13.6	2900	4.50	4.5				
	100	1	12.5							
	130	1	11							
80-100(I)A	62.6	1	11	2900	4.20	4.0				
	89	1	10							
	116	1	8.8							
80-125(I)	70	1	23.5	2900	8.50	4.0				
	100	1	20							
	130	1	14							
80-125(I)A	62.6	1	19	2900	6.00	4.0				
	89	1	16							
	116	1	11							
80-160(I)	70	1	36.5	2900	13.00	4.0				
	100	1	32							
	130	1	24							
80-160(I)A	65.4	1	32	2900	11.00	7.5				
	93.5	1	28							
	121.6	1	21							
80-160(I)B	60.6	1	72	2900	8.80	4.5				
	86.6	1	24							
	112.5	1	18							
80-200(I)	70	1	54	2900	22.00	4.5				
	100	1	50							
	130	1	42							
80-200(I)A	65.4	1	47.5	2900	18.50	4.5				
	93.5	1	44							
	121.6	1	37							
80-200(I)B	61	1	41	2900	15.00	4.5				
	87	1	38							
	113	1	32							
80-250(I)	70	1	87	2900	36.00	4.5				
	100	1	80							
	130	1	68							

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number												
80-250(I) A	65. 4	1	76	2900	27. 39	4. 5	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346												
	93. 5	1	70																	
	121. 6	1	59. 5																	
80-250(I) B	61	1	65	2900	21. 95	4. 0														
	87	1	60																	
	113	1	51																	
80-315(I)	70	1	132	2900	52. 00	4. 0														
	100	1	125																	
	130	1	114																	
80-315(I) A	66. 5	1	119	2900	44. 86	4. 0														
	95	1	113																	
	123. 6	1	103																	
80-315(I) B	63	1	106. 6	2900	38. 10	4. 0														
	90	1	101																	
	117	1	92																	
80-315(I) C	58	1	90	2900	29. 63	4. 0														
	82	1	85																	
	107	1	76																	
100-100	70	1	13. 6	2900	5. 20	4. 0														
	100	1	12. 5																	
	130	1	11																	
100-100A	62. 6	1	11	2900	3. 74	4. 5														
	89	1	10																	
	116	1	8. 8																	
100-125	70	1	23. 5	2900	8. 32	4. 5														
	100	1	20																	
	130	1	14																	
100-125A	62. 6	1	19	2900	5. 98	4. 5														
	89	1	16																	
	116	1	11																	
100-160	70	1	36. 5	2900	13. 31	4. 5														
	100	1	32																	
	130	1	24																	
100-160A	65. 4	1	32	2900	10. 96	4. 5														
	93. 5	1	28																	
	121. 6	1	21																	
100-160B	60. 6	1	27	2900	8. 74	4. 5														
	86. 6	1	24																	
	112. 5	1	18																	

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number												
100-200	70	1	54	2900	20.80	4.0	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346												
	100	1	50																	
	130	1	42																	
100-200A	65.4	1	47.5	2900	17.22	4.0														
	93.5	1	44																	
	121.6	1	37																	
100-200B	61	1	41	2900	13.90	4.0														
	87	1	38																	
	113	1	32																	
100-250	70	1	87	2900	33.28	4.0														
	100	1	80																	
	130	1	68																	
100-250A	65.4	1	76	2900	27.39	4.0														
	93.5	1	70																	
	121.6	1	59.5																	
100-250B	61	1	65	2900	21.95	4.0														
	87	1	60																	
	113	1	51																	
100-315	70	1	132	2900	52.00	4.0														
	100	1	125																	
	130	1	114																	
100-315A	66.5	1	119	2900	44.87	4.0														
	95	1	113																	
	123.6	1	103																	
100-315B	63	1	106.6	2900	38.10	4.0														
	90	1	101																	
	117	1	92																	
100-315C	58	1	90	2900	29.54	4.0														
	82	1	85																	
	107	1	76																	
100-350	60	1	153.6	2900	62.40	4.0														
	100	1	150																	
	120	1	142																	
100-350A	61	1	145.6	2900	51.95	4.0														
	87	1	142																	
	113	1	134																	
100-350B	58	1	138.6	2900	46.91	4.0														
	82	1	135																	
	107	1	127																	

型号 Type	流量 Capacity (m ³ /h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number		
100-100 (I)	96	1	14	2900	8.01	4.5	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346		
	160	1	12.5							
	192	1	10							
100-125 (I)	96	1	24	2900	12.82	4.5				
	160	1	20							
	192	1	14							
100-125 (I) A	84	1	20	2900	9.68	4.5				
	140	1	17							
	168	1	12							
100-160 (I)	96	1	36	2900	20.51	5.6				
	160	1	32							
	192	1	27							
100-160 (I) A	84	1	32	2900	15.94	5.0				
	140	1	28							
	168	1	23.5							
100-160 (I) B	83	1	27	2900	13.51	5.0				
	138	1	24							
	166	1	21							
100-200 (I)	96	1	53	2900	32.06	5.2				
	160	1	50							
	192	1	45							
100-200 (I) A	84	1	48	2900	13.61	4.5				
	140	1	45							
	168	1	40							
100-200 (I) B	60	1	43	2900	17.70	4.5				
	100	1	40							
	120	1	36							
100-250 (I)	96	1	83	2900	51.29	4.8				
	160	1	80							
	192	1	72							
100-250 (I) A	84	1	75	2900	42.70	4.5				
	140	1	75							
	168	1	65							
100-250 (I) B	60	1	68	2900	27.04	4.5				
	100	1	65							
	120	1	58							
125-100	96	1	13	2900	8.01	4.0				
	160	1	12.5							
	192	1	12							

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number		
125-100A	86	1	10.4	2900	5.79	4.0	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346		
	143	1	10							
	172	1	9.6							
125-125	96	1	22.6	2900	12.82	4.0				
	160	1	20							
	192	1	17							
125-125A	86	1	18	2900	9.28	4.0				
	143	1	16							
	172	1	13.6							
125-160	96	1	36	2900	20.51	4.0				
	160	1	32							
	192	1	28							
125-160A	90	1	31.5	2900	16.95	4.0				
	150	1	28							
	180	1	24.5							
125-160B	83	1	27	2900	13.51	4.0				
	138	1	24							
	166	1	21							
125-200	96	1	55	2900	32.05	5.5				
	160	1	50							
	192	1	46							
125-200A	90	1	48.4	2900	26.64	5.5				
	150	1	44							
	180	1	40.5							
125-200B	83	1	41.3	2900	21.11	5.5				
	138	1	37.5							
	166	1	34.5							
125-250	96	1	87	2900	51.29	5.5				
	160	1	80							
	192	1	73							
125-250A	90	1	76	2900	42.39	5.5				
	150	1	70							
	180	1	84							
125-250B	83	1	65	2900	33.77	5.5				
	138	1	60							
	166	1	55							
125-315	96	1	133	2900	80.15	5.0				
	160	1	125							
	192	1	119							

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number										
125-315A	90	1	117	2900	66.61	5.0	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346										
	150	1	110															
	180	1	104.6															
125-315B	86	1	106.4	2900	57.99	5.0												
	143	1	100															
	172	1	95.2															
125-315C	80.5	1	96	2900	47.96	5.0												
	134	1	88															
	161	1	86															
150-125	96	1	22.6	2900	12.82	4.0												
	160	1	20															
	192	1	17															
150-125A	90	1	18	2900	9.68	4.0												
	150	1	16															
	180	1	13.6															
150-160	96	1	36	2900	20.52	4.0												
	160	1	32															
	192	1	27															
150-160A	90	1	32	2900	16.95	4.0												
	150	1	28															
	180	1	23.5															
150-160B	84	1	27	2900	13.67	4.0												
	140	1	24															
	168	1	21															
150-200	140	1	13.8	1450	9.87	3.0												
	200	1	12.5															
	260	1	10.6															
150-200A	125	1	11	1450	7.03	3.0												
	176	1	10															
	232.5	1	8.5															
150-200B	111.7	1	92	1450	5.13	3.0												
	160	1	8															
	207.4	1	6.8															
150-250	140	1	21.8	1450	15.79	3.0												
	200	1	20															
	260	1	17															
150-250A	129	1	18.5	1450	12.52	3.0												
	184.4	1	17															
	240	1	14.4															

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number												
150-250B	117	1	15.2	1450	9.35	3.0	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346												
	167	1	14																	
	217.5	1	12																	
150-315	140	1	33.8	1450	25.28	2.5														
	200	1	32																	
	260	1	28																	
150-315A	131	1	29.5	2900	20.89	3.5														
	187	1	28																	
	243	1	24.5																	
150-315B	121	1	25	1450	16.59	3.5														
	173	1	24																	
	225	1	21																	
150-350	96	1	153.6	2900	96.46	5.5														
	160	1	150																	
	192	1	142.8																	
150-350A	90	1	145.6	2900	85.99	5.5														
	150	1	142																	
	180	1	134.8																	
150-350B	84	1	138.6	2900	76.87	5.5														
	140	1	135																	
	168	1	127.8																	
150-400	140	1	53	1450	23.70	3.5														
	200	1	30																	
	260	1	44																	
150-400A	131	1	40.6	1450	32.73	3.5														
	187	1	44																	
	243	1	38.3																	
150-400B	122	1	40	1450	26.38	3.5														
	174	1	38																	
	226.5	1	33																	
150-400C	112	1	34	1450	20.83	3.5														
	160	1	32																	
	208	1	28																	
150-250(1)	120	1	87	2900	63.19	4.5														
	200	1	80																	
	240	1	72																	
150-250(1)A	112	1	76	2900	52.07	4.5														
	187	1	70																	
	224	1	63																	

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number												
150-250(1)B	104	1	65	2900	41.41	4.5	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346												
	173	1	60																	
	208	1	54																	
150-315(1)	120	1	133	2900	98.73	4.5														
	200	1	125																	
	240	1	120																	
150-315(1)A	112	1	116	2900	81.83	4.5														
	187	1	110																	
	224	1	105																	
150-315(1)B	104	1	100	2900	65.67	4.5														
	173	1	95																	
	208	1	91																	
200-200	140	1	13.8	1450	9.87	3.0														
	200	1	12.5																	
	260	1	10.6																	
200-200A	175	1	11	1450	7.14	3.0														
	179	1	10																	
	232.5	1	8.5																	
200-250	140	1	21.8	1450	15.79	3.0														
	200	1	20																	
	260	1	17																	
200-250A	129	1	18.5	1450	12.47	3.0														
	184.4	1	17																	
	240	1	14.4																	
200-250B	117	1	15.2	1450	9.38	3.0														
	167	1	14																	
	217.5	1	12																	
200-315	140	1	33.8	1450	25.27	3.5														
	200	1	32																	
	260	1	28																	
200-315A	131	1	29.5	1450	21.05	3.5														
	189	1	28																	
	243	1	24.5																	
200-315B	121	1	25	1450	12.43	3.5														
	173	1	24																	
	225	1	21																	
200-400	140	1	53	1450	39.49	3.5														
	200	1	50																	
	260	1	44																	

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number												
200-400A	131	1	46.6	1450	32.77	3.5	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346												
	187	1	44																	
	243	1	38.3																	
200-400B	122	1	40	1450	26.38	3.5														
	174	1	38																	
	226.5	1	33																	
200-400C	112	1	34	1450	20.58	3.5														
	160	1	32																	
	208	1	28																	
200-200(1)	280	1	13.4	1450	18.92	4.0														
	400	1	12.5																	
	520	1	10.5																	
200-200(1)A	250	1	10.7	1450	13.64	4.0														
	358	1	10																	
	465	1	8.5																	
200-250(1)	280	1	22.2	1450	30.28	4.0														
	400	1	20																	
	520	1	14																	
200-500	250	1	18	1450	19.10	4.0														
	358	1	14																	
	465	1	11.2																	
200-500A	226	1	14.4	1450	16.02	4.0														
	322	1	13																	
	419	1	7.3																	
200-500B	280	1	36	1450	48.44	4.0														
	400	1	32																	
	520	1	26																	
200-315(1)A	262	1	31.5	1450	39.74	4.0														
	374	1	28																	
	486	1	23																	
200-315(1)B	242	1	27	1450	31.69	4.0														
	346	1	24																	
	450	1	19.5																	
200-400(1)	280	1	54.5	1450	75.69	4.0														
	400	1	50																	
	520	1	39																	
200-400(1)A	262	1	48	1450	62.45	4.0														
	374	1	44																	
	486	1	34																	

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number												
200-400(1)B	242	1	41.4	1450	50.18	5.0	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346												
	346	1	38																	
	450	1	29.6																	
200-400(1)C	224	1	34.9	1450	39.19	5.0														
	320	1	32																	
	416	1	25																	
250-250	350	1	22	1450	40.78	5.0														
	550	1	20																	
	650	1	16																	
250-250A	300	1	18.3	1450	31.79	5.0														
	500	1	17																	
	600	1	14																	
250-235	300	1	14	1480	23.33	4.5														
	500	1	12.5																	
	600	1	11																	
250-300	300	1	22	1480	37.33	4.5														
	500	1	20																	
	600	1	16																	
250-315	350	1	34	1450	65.25	5.5														
	550	1	32																	
	650	1	28																	
250-315A	300	1	29.5	1450	52.26	5.5														
	500	1	28																	
	600	1	24																	
250-315B	260	1	25	1450	40.59	5.5														
	450	1	24																	
	520	1	20																	
250-400	300	1	54.5	1480	93.32	4.5														
	500	1	50																	
	600	1	39																	
250-400A	262	1	46.6	1480	74.42	4.5														
	450	1	44																	
	521	1	38.3																	
200-500(1)	385	1	87	1480	163.79	5.5														
	550	1	80																	
	660	1	68																	
200-500(1)A	357	1	76.1	1480	133.08	4.5														
	510	1	70																	
	612	1	59.5																	

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
200-500(1)B	329	1	65.2	1480	105.7	4.5	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346
	470	1	60					
	564	1	51					
300-235	540	1	20.5	1450	47.85	5.0		
	720	1	18					
	900	1	15					
300-235A	450	1	17.2	1450	33.37	5.0		
	600	1	15					
	720	1	12.5					
300-235B	420	1	14.3	1450	25.13	5.0		
	540	1	12.5					
	650	1	10.5					
300-250	540	1	22.5	1450	53.17	6.0		
	720	1	20					
	900	1	17					
300-250A	450	1	19.5	1450	37.82	6.0		
	600	1	17					
	720	1	14					
300-300	540	1	32	1480	74.44	5.0		
	720	1	28					
	900	1	23					
300-300A	450	1	27.5	1480	53.39	5.0		
	600	1	24					
	720	1	20					
300-300B	420	1	24	1480	42.22	5.0		
	540	1	21					
	650	1	17					
300-315	540	1	35	1480	85.07	4.5		
	720	1	32					
	900	1	26					
300-315A	460	1	31.5	1480	67.38	4.5		
	650	1	28					
	800	1	23.5					
300-315B	420	1	27	1480	51.68	4.5		
	580	1	24					
	700	1	20					
300-400	540	1	54.5	1480	132.93	5.0		
	720	1	50					
	900	1	42					

型号 Type	流量 Capacity (m³/h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number																		
300-400A	460	1	47	1450	105.89	5.0	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346																		
	650	1	44																							
	800	1	37																							
300-400B	420	1	41	1450	81.82	5.0																				
	580	1	38																							
	700	1	32																							
350-250	600	1	14	980	36.72	4.5																				
	800	1	12.5																							
	960	1	10.5																							
350-250A	800	1	20	980	62.95	4.5																				
	1080	1	16																							
	1350	1	12																							
350-315	600	1	22.5	980	58.76	4.5																				
	800	1	20																							
	960	1	17.5																							
350-315A	600	1	35.5	980	94.02	4.5																				
	800	1	32																							
	960	1	28.5																							
350-315B	600	1	55	980	146.90	4.5																				
	800	1	50																							
	960	1	45.5																							
350-400	920	1	23	980	81.67	6.0																				
	1180	1	19																							
	1300	1	16																							
350-400A	950	1	32	980	127.16	6.0																				
	1250	1	28																							
	1500	1	24																							
350-400B	1500	1	16	980	90.71	6.0																				
	1800	1	14																							
	2000	1	12																							

4、 1WTD2.4-10.5 系列船用立式旋涡泵

1WTD2.4-10.5 series marine horizontal vortex(regenerative) pump



洁冠®
JIEGUAN



ISO
9001
SINCE 2010

The member of China
association of the
national shipbuilding industry



MID:CT187

WWW.PACIFICOCEANPUMP.COM

1WTD SERIES MARINE HORIZONTAL VORTEX(REGENERATIVE) PUMP



Type	1WTD2.4-10.5
Capacity	2.4m³/h
Head	105m
Speed	2860r/min
Shaft Power	1.89kw
NPSHr	4m
Pump body material	HT200 (JL200)

张家港市太平洋泵业制造有限公司
ZHANGJIAGANG PACIFIC PUMP MANUFACTURING CO., LTD.

选型数据表 Selection data sheet

型号 Type	流量 Capacity (m³/h)	级数 Series	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀 余量 (NPSH) r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
1WTD2.4-10.5	2.4	1	105	2860	1.89	4	HT200 (JL200)	JS24PTB00346

5、DL-G 高压泵系列

DL-G High pressure pump series



洁冠
JIEGUAN



ISO
9001
SINCE 2010

The member of China
association of the
national shipbuilding Industry

MID:CT187



WWW.PACIFICOCEANPUMP.COM

洁冠[®]

JIEGUAN

“

**DL-G high pressure
series marine vertical
multistage
centrifugal
PUMP**

”



IE3 MOTER

HOT DIP
GALVANIZING BOLTS

DISCHARGE

SUCTION

Nominal diameter	40mm to 65mm
Flow rate	up to 60m ³ /h (264.18US gpm)
Pressure	up to 80bar (1160psi)
Temperature	Up to 120 °C (248 °F)
Pumped liquid	Fresh water sea water
Installation	Vertical
Frequency	50 to 60 Hz
Motor	Standard and EX motor
Design service life	20 years

张家港市太平洋泵业制造有限公司

ZHANGJIAGANG PACIFIC PUMP MANUFACTURING CO., LTD.

选型数据表 Selection data sheet

型号 Type	流量 Capacity (m ³ /h)	级数	扬程 Head (m)	额定转速 Rated Rev (r/min)	轴功率 Shaft power (kW)	必需汽蚀余量 (NPSH)r (m)	泵体材质 Pump body material	CCS 型式认可证书号 CCS type approval certificate number
DL-G8	8/9.6	2	80/115	2900/3500	4.6/7.9	2.1	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346
	8/9.6	3	120/172	2900/3500	6.9/11.8	2.1		
	8/9.6	4	160/230	2900/3500	9.2/15.8	2.1		
	8/9.6	5	200/288	2900/3500	11.5/19.8	2.1		
	8/9.6	6	240/345	2900/3500	13.8/23.8	2.1		
	8/9.6	7	280/403	2900/3500	16.1/27.7	2.1		
	8/9.6	8	320/460	2900/3500	18.4/31.8	2.1		
	8/9.6	9	360/518	2900/3500	20.6/35.6	2.1		
	8/9.6	10	400/576	2900/3500	22.9/39.6	2.1		
	8/9.6	11	440/634	2900/3500	25.2/43.6	2.1		
	8/9.6	12	480/691	2900/3500	27.5/47.5	2.1		
	8/9.6	13	520/748	2900/3500	29.8/51.4	2.1		
	8/9.6	14	560/806	2900/3500	32.1/55.4	2.1		
	8/9.6	14	560/806	2900/3500	32.1/55.4	2.1		
DL-G13	13/15.6	2	80/115	2900/3500	5.9/10.2	2.2	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346
	13/15.6	3	120/172	2900/3500	8.9/15.2	2.2		
	13/15.6	4	160/230	2900/3500	11.8/20.4	2.2		
	13/15.6	5	200/288	2900/3500	14.8/25.5	2.2		
	13/15.6	6	240/345	2900/3500	17.7/30.6	2.2		
	13/15.6	7	280/403	2900/3500	20.7/35.7	2.2		
	13/15.6	8	320/460	2900/3500	23.6/40.7	2.2		
	13/15.6	9	360/518	2900/3500	26.6/45.9	2.2		
	13/15.6	10	400/576	2900/3500	29.5/51.0	2.2		
	13/15.6	11	440/634	2900/3500	32.5/56.1	2.2		
	13/15.6	12	480/691	2900/3500	35.4/61.2	2.2		
	13/15.6	13	520/748	2900/3500	38.4/66.2	2.2		
	13/15.6	14	560/806	2900/3500	41.3/71.4	2.2		
	13/15.6	14	560/806	2900/3500	41.3/71.4	2.2		
DL-G42	42/50	1	50/72	2900/3500	8.8/15.2	3.0	HT200 QT450-10 SUS304 SUS316L	JS24PTB00346
	42/50	2	100/144	2900/3500	17.7/30.6	3.0		
	42/50	3	150/216	2900/3500	26.5/45.8	3.0		
	42/50	4	200/288	2900/3500	35.4/61.2	3.0		
	42/50	5	250/360	2900/3500	44.3/76.6	3.0		
	42/50	6	300/432	2900/3500	53.1/91.8	3.0		
	42/50	7	350/504	2900/3500	61.9/107.1	3.0		
	42	8	400	2900	70.8	3.0		
	42	9	450	2900	79.2	3.0		
	42	10	500	2900	88.0	3.0		
	42	11	550	2900	96.8	3.0		
	42	12	600	2900	105.6	3.0		
	42	12	600	2900	105.6	3.0		
	42	12	600	2900	105.6	3.0		